


50 AG series

x50x15mm

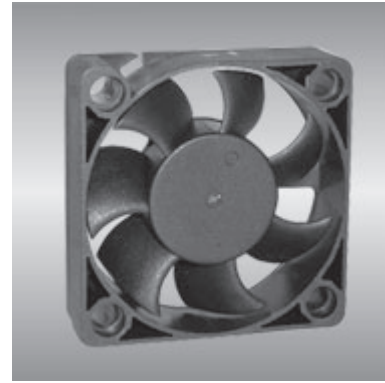

General Specifications

- Motor : 4 Poles brushless DC motor
- Frame & Impeller : Plastic(UL 94V-0)
- Storage temperature : -40° to +75°
- Operating temperature : -10° to +70°

Major Characteristic Parameters

Model	*Bearing System	Rated Voltage	Operating Voltage Range	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level	Weight
Part NO.	B / S / F	V	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA	g
AGE05015_12J	B / S	12	7.0~13.2	0.10	4000	0.28	10.0	2.8	0.11	24.0	24
AGE05015_24J	B / S	24	14.0~26.4	0.07	4000	0.28	10.0	2.8	0.11	24.0	24
AGE05015_12L	B / S	12	7.0~13.2	0.13	4800	0.34	11.8	3.8	0.15	28.0	24
AGE05015_24L	B / S	24	14.0~26.4	0.08	4800	0.34	11.8	3.8	0.15	28.0	24
AGE05015_12M	B / S	12	7.0~13.2	0.15	5600	0.39	13.8	5.1	0.20	32.0	24
AGE05015_24M	B / S	24	14.0~26.4	0.10	5600	0.39	13.8	5.1	0.20	32.0	24
AGE05015_12H	B / S	12	7.0~13.2	0.21	6400	0.45	15.8	7.0	0.27	36.0	24
AGE05015_24H	B / S	24	14.0~26.4	0.12	6400	0.45	15.8	7.0	0.27	36.0	24

*Bearing system B: Two Ball Bearing F: Fluid Bearing S: Sleeve Bearing

