



AS6076

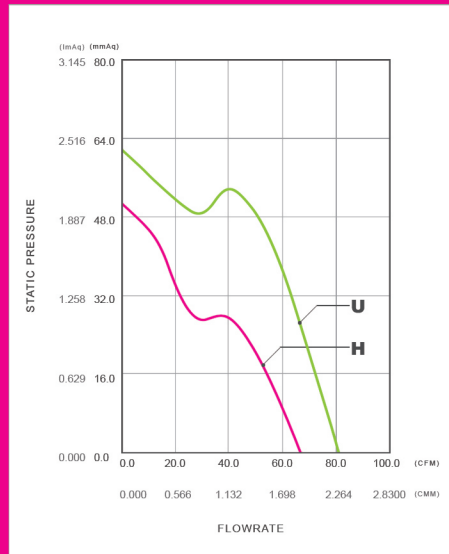

Frame: Plastic (UL: 94V-0)
 Impeller: Plastic (UL: 94V-0)
 Lead wire: UL1007AWG24

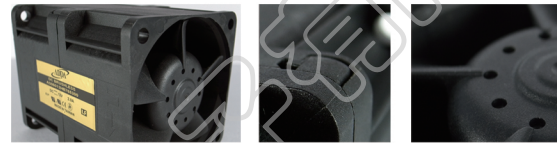

Fan Performance Curve

Frame size (mm)	60x60x76	
Model No.	AS06012HB765300	AS06012UB765300
Bearing System Type	Ball	Ball
Rated Voltage (VDC)	12	12
Current (A)	1.6	2.6
Power (W)	19.2	31.2
Rated Speed (rpm)	In:11500 Out:7000	In:11000 Out:13000
Maximum AirFlow		
(CMM)	1.882	2.296
(CFM)	66.54	81.07
Maximum Pressure		
(InAq)	2.008	2.437
(mmAq)	51	61.9
*Noise Level (dB/A)	64.5	67.9
Weight (g)	260	260






AS6076 SERIES



External Dimensions

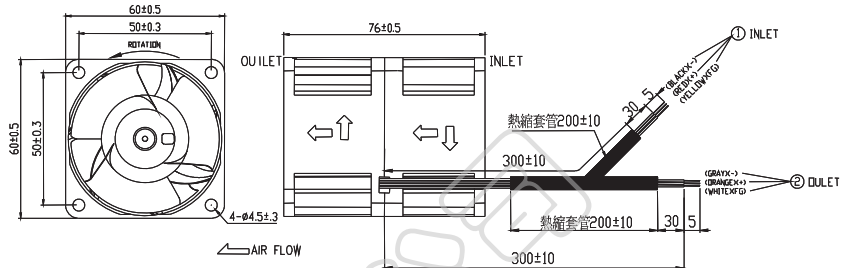

Frame: Plastic (UL:94V-0)
 Impeller: Plastic (UL:94V-0)
 Lead wire: UL1007AWG24


Specifications (Nominal)

*Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ※=Sleeve ○=1B1S ●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM)	Maximum AirFlow (CFM)	Maximum Pressure (InAq)	Maximum Pressure (mmAq)	*Noise Level (dB/A)	Weight (g)
60x60x76	AS06012HB765300	◎	12	1.60	19.20	IN:11500/ OUT:7000	1.882	66.54	2.008	51.00	64.5	260.0
	AS06012UB765300	◎	12	2.60	31.20	IN:11000/ OUT:13000	2.296	81.07	2.437	61.90	67.9	

Specifications subject to change without notice.

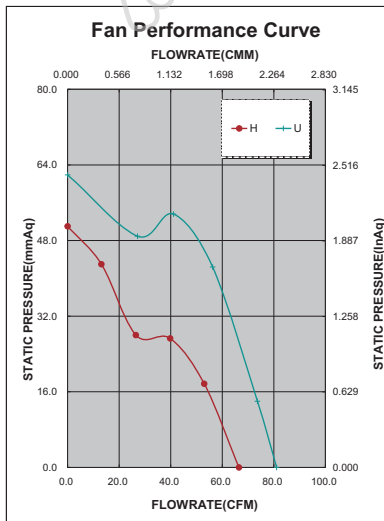

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
	✓	✓	✓							

*Safety approvals

✓	✓		✓	✓